
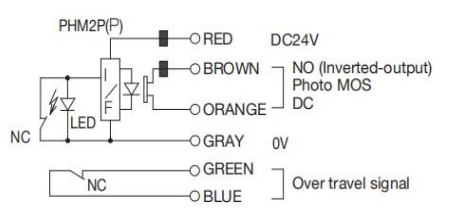


# Silvercnc Tool Setter - MK-M26D-20

## specifications

<b>Product name</b>	<b>M26D-20</b>
Contact diameter	Ø20mm
Surface finishing	Grinding 4s
Contact material	Tungsten carbide
Contact structure	NC (Normally closed)
Pretravel	0
Stroke	5mm
Repeatability	0.002(Recommended operating speed of 50 - 200mm/min)
Contact life time	3 million
Protective structure	IP67
Contact force	1.5N (Installation position: Vertical)
Cable	Oil resistant, standard 5 m (length can be customized)φ4.8 / 6 cores
LED lamp	Default : LED OFF / Operating : LED ON
<b>Over travel signal (built-in microswitch)</b>	
Output mode	NC normally closed (an emergency stop when the signal broken )
Contact rating	DC24V 20 mA resistive load





**PHM2P(P)**    □ ○ RED    DC24V  
                   □ ○ BROWN } NO (Inverted-output)  
                   ○ ORANGE } Photo MOS  
                   ○ GRAY    DC  
                   ○ GREEN    0V  
                   ○ BLUE    } Over travel signal

Power supply voltage : DC24V  
 Power consumption : 10mA  
 Output capacity : DC60V 100mA 截断(Alt + A) load

## Dimension

