




# Silvercnc Tool Setter - T24E/20/40/60

## specifications

<b>Product name</b>	<b>MK-T24E-20/40/60</b>
Contact diameter	Ø20/40/60mm
Surface finishing	Grinding 4s
Contact material	Tungsten carbide
Contact structure	NO (Normally open)
Pretravel	0.5mm
Stroke	12mm
Repeatability	0.002(Recommended operating speed of 50 - 200mm/min)
Contact life time	3 million
Protective structure	IP67
Contact force	2.5N (Installation position: Vertical)
Cable	Oil resistant, standard 5 m (length can be customized)φ4.8 / 6 cores
LED lamp	Default : LED OFF / Operating : LED ON
<b>Over travel signal (built-in microswitch)</b>	
Output mode	NC normally closed (an emergency stop when the signal broken )
Contact rating	DC24V 20 mA resistive load

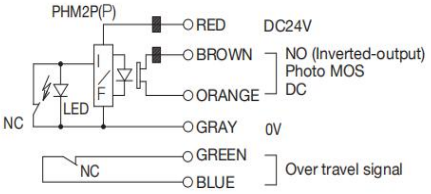

Power supply voltage : DC24V  
 Power consumption : 10mA  
 Output capacity : DC60V 100mA 載重(Alt + A) load

## Dimension

